


3-11 APP Software Connection (Android for example)

1. Go "Google Play" or APP store (iOS) to download the "SoCatch".



2. Press the "New" icon in the upper right corner to add a new connection.

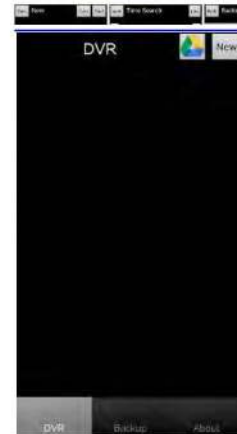

3. Give a Name of this connection and input network address 、 port (default:80) 、 Username (default : admin) and Password (Default : 123456), or press "Lan Search IP" to search DVR/IP CAM IP in the same network.



4. Devices in the same network segment are going to be found and you can pick one of them but only the device which Swift Connection supported can be show on the screen.



5. Multiscreen can be chose in Live view




6. Video quality \ mute and unmute audio



7. Searching by Time or Log files



8. You can search by time or event (log type) in the log search.

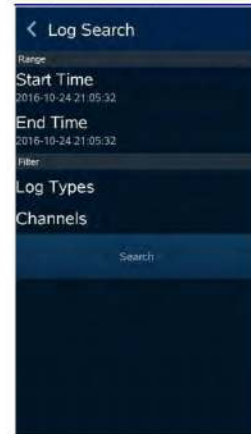

- Highlights in the monthly calendar are those days which has video recording. Pick one of them and choose a start time to watch the recording.



- Play Rewind \ Forward \ Pause and Start/Stop



- Mute and unmute the audio




- Multiple screen selection



13. Choose a section of the recording and back it down to your device

- i. Mark In/out : Press "Mark In" to set start time and wait for a while then press "Mark Out" to set stop backup time.
- ii. Go Backup : After setting duration and channel, press "Calculate" key to calculate required space, then press "Download".

*Note: DO NOT execute another application program during backup download.

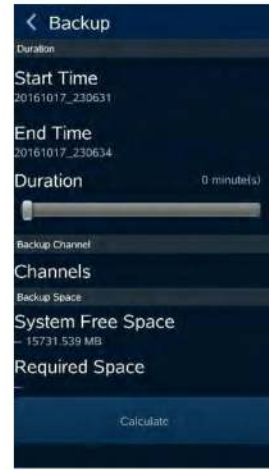


14. Other settings, such as PTZ 、Relay 、Zoom... etc.



15. Status : Status of each channel


16. Backup list : All the backup files should be listed on the backup list. Press any file on the list to execute the file.

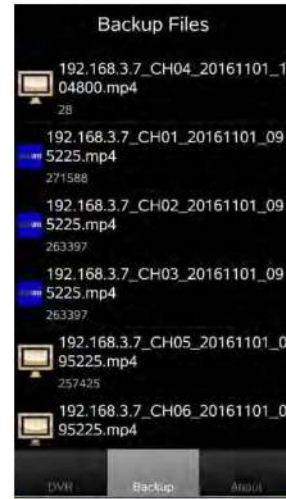

3-12 P2P Connection Setup

How to Setup

1. On your DVR/IVR, please go to Network Setup page:
Main control panel => Configuration => Network Setup
2. On lower part of Network Setup page, please input P2P Access Key for P2P and press Apply button.

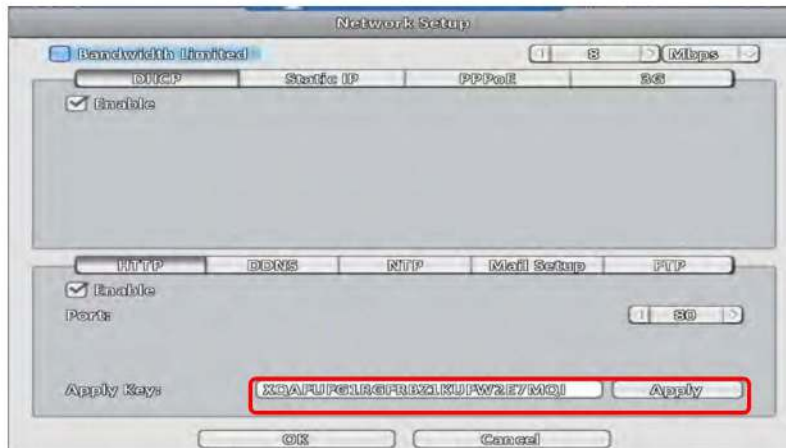

Please press OK button on lower part of Network Setup page and return to Configuration level.

3. Please go to System Information page:
Main control panel => Configuration => System Information



Under Network tag, you can find QR code, access key and expiry date for P2P feature.



For computer use, please login iWatchDVR.
 On prompting interface, please input P2P Access Key in Host field, input / modify the rest of fields as appropriate
 Click on Connect button

- For mobile device (i.e., smart phone and tablet) users, please login APP "Socatch"
 Click '+' (iOS) / 'New' (Android) icon on upper right corner to add a new connection.



iOS



Android

- Click on Scan QR code button as shown on following picture.



iOS



Android

- Please scan QR code on DVR's System Information page



- Access key information will be shown on Host field



Input / modify the rest of fields as appropriate.

Click on Save button on upper right corner.

Login with new settings